


UP2/OIL gear pump for lubricating oil

Quick Overview

Self-priming electric pumps with helical bronze gears for transferring lubricating oils and viscous liquids. Nickel-plated brass body and stainless steel shaft. Particularly suitable for draining engine sumps with the special tubes kit (OK1) and for engines lubricating operations.

Part n.	Name	Volta ge (V)	Cons umpt ion (A)	Fuse (A)	Self- primi ng (m)	Press ure (bar)	Flow rate ø 6 (l /min)	Flow rate ø 8 (l /min)	Flow rate ø 13 (l/mi n)	Ports (BSP)	Hose (ID) (mm)	IP Pr otect ion	Mot or pow er (W)	Weig ht (kg)
16422012	UP2/OIL	12	2,5	3	1	1,5	0,3	0,9	3,3	3/8"	12	67	90	1,2
16422013	UP2/OIL	24	1,3	1,5	1	1,5	0,3	0,9	3,3	3/8"	12	67	90	1,2

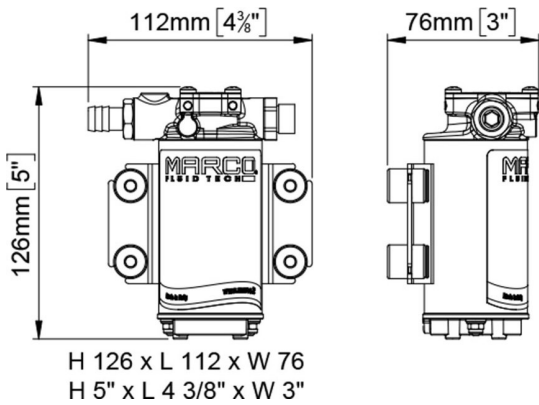

OK1 tube kit for oil pumps