


EW2 electronic whistle 12/20 m + fog signal

Quick Overview

Approved electronic whistle complete with loudspeaker, built-in membrane control panel and electronic controller. New ultrasonic heating system for improved acoustic membrane performance. Meets COLREG 1972 IMO class IV international regulations with RINA, LLOYD'S REGISTER MCA, BUREAU VERITAS, NMMA and BSH homologations. Includes mounting kit.

Part n.	Name	Voltage (V)	Consumption (A)	Hz	dB (1/3 oct) (1m)	Dimensions (in)
15004012	EW2	12	3	690	>120	Ø9.4"x9.8"
15004013	EW2	24	1,5	690	>120	Ø9.4"x9.8"

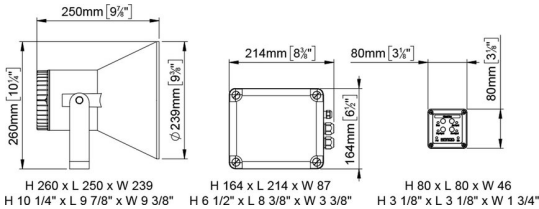

**SB-UV Control panel for
electronic horns, IP67**